


FÖR DIG SOM ANVÄNDER NEXA BRIDGE

Koppla en eller flera individuella brandvarnare till Nexa Bridge

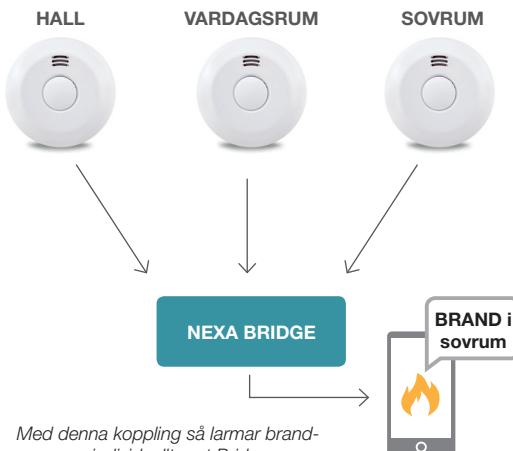


Med denna koppling så larmar brandvarnarna individuellt mot Bridgen men inte mot varandra.

Om du vill koppla Nexas brandvarnare individuellt i flera olika utrymmen, exempelvis vardagsrum, hall och sovrum så måste du lära in respektive brandvarnare till Nexa Bridge.

1. Välj lägg till enhet, därefter välj Fire & Safety
2. Håll inne testknappen på brandvarnaren tills appen bekräftar.
3. Gör sedan om samma procedur för nästa brandvarnare.

Nu fungerar dessa individuellt mot Nexa Bridge och du kan skapa notiser och döpa dina brandvarnare för respektive rum. I detta läget är inte brandvarnarna sammankopplade med varandra.

Sammankopplade brandvarnare till Nexa Bridge

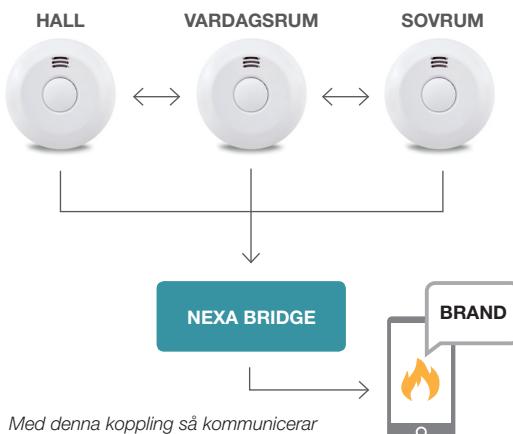

Med denna koppling så kommunicerar brandvarnarna med varandra, "larmar en så larmar alla" men Bridgen kan inte identifiera vilken som larmat först.


Om du valt att sammankoppla brandvarnarna (se manual för FS-558/RF) så har du från början skapat en "Master".

1. Välj lägg till enhet, därefter välj Fire & Safety
2. Håll inne testknappen på "Master" brandvarnaren tills appen bekräftar.

När du lärt in din "Master" i Bridge, så behöver du inte lära in övriga brandvarnare. Alla larmar gemensamt till Bridge och det går inte att se vilken brandvarnare som larmat.

FOR NEXA BRIDGE USERS

Connect one or more smoke alarms to Nexa Bridge

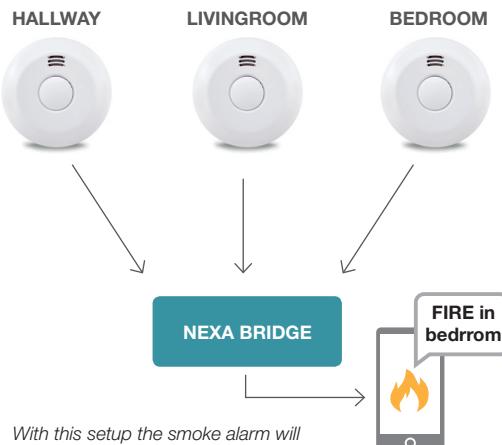


With this setup the smoke alarm will alert the Nexa Bridge individually.

If you want to connect the smoke alarms individually:

1. Select add device, then select Fire & Safety
2. Keep the test button on the smoke alarm pushed down until the app confirms.
3. Do the same procedure for all the smoke alarms that you want to connect.

Now they work individually with Nexa Bridge and you can create notifications and rename your smoke alarms for each room. In this mode, the smoke alarms are not connected to each other.

Interconnected smoke alarms and Nexa Bridge

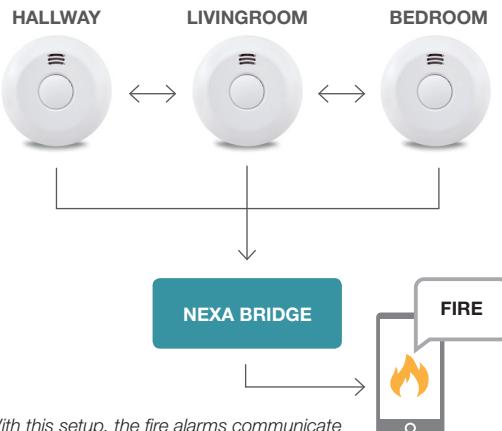

With this setup, the fire alarms communicate with each other, but the Bridge can not identify which one detected smoke.

If you have interconnected smoke alarms, you have initially created a "Master".

1. Select add device, then select Fire & Safety
2. Keep the test button on the "Master" pushed down until the app confirms

In this configuration, all detectors will alert Nexa Bridge, however it is not possible for the Bridge to identify which unit that has detected smoke.